

COM 12 ZS

Luminaire: Profile, halogen, 1200W zoom 13°-35°, GX9.5



Type

Conventional line

Family

Profile

Source

Halogen

Power

1000W 1200W

Connectors

Cable without plug

Lamp holder

GX9.5

Voltage

220-240V, 50-60Hz

Product sizes

9.8Kg

Pack sizes

332mm x 332mm x 787mm

11.5Kg

0.087m³

DWG

Available on website


User manual

Available on website


Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Filter frame lockable top cover
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Easy access to the lamphouse for fast maintenance
- Adjustable lampholder position for proper LCL settings
- 99,99% polished and treated aluminum reflector
- PO version on request, with 2-way pole operation for tilt and pan
- ARC version on request, with 3-way DMX control of tilt, pan and iris diaphragm

Sizes (in mm)

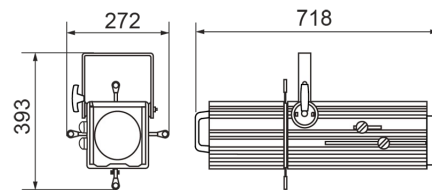

Light output diagram

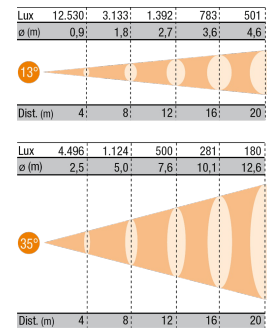

Accessories

ARC STAGE/2

Yoke: 2-way DMX motorized

ARC STAGE/3

Yoke: 3-way DMX motorized

DIA 10

Acc: Iris diaphragm

DIA 10 BO

Acc: Iris diaphragm with blackout

FUNE

Acc: Safety net with spring hook

GAC

Acc: Hook clamp for 40/50mm tube

HC/075

Acc: Half swivel coupler 75kg max

PGB R 130

Acc: B size adjustable gobo-holder

PO/2 SP12

Yoke: Pole Operated for Pan-Tilt

TC S12

Acc: Colour frame

LED equivalents

PR LED 200 ZS CW UD

Luminaire: Profile, LED, 200W, CW

PR LED 200 ZS NW UD

Luminaire: Profile, LED, 200W, NW

PR LED 200 ZS WW UD

Luminaire: Profile, LED, 200W, WW

PR LED 250Z S RGBWDMX

Luminaire: Profile, LED, 250W, RGBW

PR LED 250Z S TW DMX

Luminaire: Profile, LED, 250W, TW

PR LED 250Z S WW DMX

Luminaire: Profile, LED, 250W, WW

PR LED 250Z S CW DMX

Luminaire: Profile, LED, 250W, CW

PR LED 250Z N CW DMX

Luminaire: Profile, LED, 250W, CW

PR LED 250Z N WW DMX

Luminaire: Profile, LED, 250W, WW

PR LED 250Z N TW DMX

Luminaire: Profile, LED, 250W, TW

PR LED 250Z N RGBWDMX

Luminaire: Profile, LED, 250W, RGBW