

COM 25 ZM

Luminaire: Profile, halogen, 2500W zoom 12°-25°, G22



Type

Conventional line

Family

Profile

Source

Halogen

Power

2000W 2500W

Connectors

Cable without plug

Lamp holder

G22

Voltage

220-240V, 50-60Hz

Product sizes

25.1Kg

Pack sizes

360mm x 1205mm x 480mm

30.4Kg

0.208m³

DWG

Available on website


User manual

Available on website


Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Filter frame lockable top cover
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Adjustable lampholder position for proper LCL settings
- 99,99% polished and treated aluminum reflector
- PO version on request, with 2-way pole operation for tilt and pan
- ARC version on request, with 3-way DMX control of tilt, pan and iris diaphragm

Sizes (in mm)

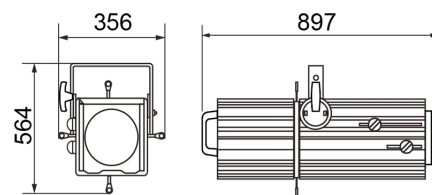

Light output diagram

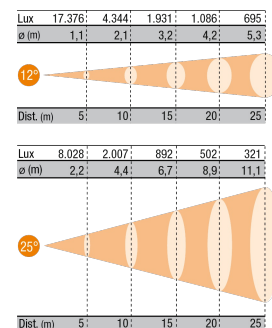

Accessories

ARC STAGE/2 +

Yoke: 2-way DMX motorized

ARC STAGE/3 +

Yoke: 3-way DMX motorized

DIA 20

Acc: Iris diaphragm

DIA 20 BO

Acc: Iris diaphragm with blackout

FUNE

Acc: Safety net with spring hook

GAC

Acc: Hook clamp for 40/50mm tube

HC/075

Acc: Half swivel coupler 75kg max

PGA R 185

Acc: A size adjustable gobo-holder

PGB R 185

Acc: B size adjustable gobo-holder

PO/2 SP25

Yoke: Pole Operated for Pan-Tilt

PO/3 SP25

Yoke: Pole Operated for Pan-Tilt-Focus

TC S25

Acc: Colour frame

LEDequivalents

PR LED 450 Z S TW DMX

Luminaire: Profile, LED, 450W, TW

PR LED 450 Z SRGBWDMX

Luminaire: Profile, LED, 450W, RGBW

PR LED 450 Z S WW DMX

Luminaire: Profile, LED, 450W, WW

PR LED 450 Z S CW DMX

Luminaire: Profile, LED, 450W, CW

PR LED 450 Z N RGBWDMX

Luminaire: Profile, LED, 450W, RGBW

PR LED 450 Z N WW DMX

Luminaire: Profile, LED, 450W, WW

PR LED 450 Z N CW DMX

Luminaire: Profile, LED, 450W, CW

PR LED 450 Z N TW DMX

Luminaire: Profile, LED, 450W, TW

PR LED 450 Z W TW DMX

Luminaire: Profile, LED, 450W, TW

PR LED 450 Z W CW DMX

Luminaire: Profile, LED, 450W, CW

PR LED 450 Z W RGBWDMX

Luminaire: Profile, LED, 450W, RGBW

PR LED 450 Z W WW DMX

Luminaire: Profile, LED, 450W, WW