

# COM 25 ZW

Luminaire: Profile, halogen, 2500W  
zoom 17°-36°, G22



## Type

Conventional line

## Family

Profile

## Source

Halogen

## Power

2000W 2500W

## Connectors

Cable without plug

## Lamp holder

G22

## Voltage

220-240V, 50-60Hz

## Product sizes

21.3Kg

## Pack sizes

360mm x 1205mm x 480mm

27.8Kg

0.208m<sup>3</sup>

## DWG

Available on website


## User manual

Available on website


## Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Filter frame lockable top cover
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Easy access to the lamphouse for fast maintenance
- Adjustable lampholder position for proper LCL settings
- 99,99% polished and treated aluminum reflector
- PO version on request, with 2-way pole operation for tilt and pan
- ARC version on request, with 3-way DMX control of tilt, pan and iris diaphragm

## Sizes (in mm)

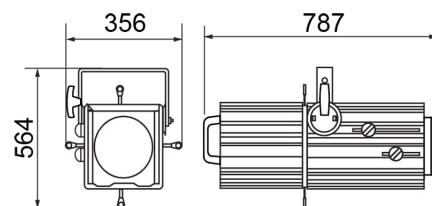

## Light output diagram



## Accessories

ARC STAGE/2 +

Yoke: 2-way DMX motorized

ARC STAGE/3 +

Yoke: 3-way DMX motorized

DIA 20

Acc: Iris diaphragm

DIA 20 BO

Acc: Iris diaphragm with blackout

FUNE

Acc: Safety net with spring hook

GAC

Acc: Hook clamp for 40/50mm tube

HC/075

Acc: Half swivel coupler 75kg max

PGA R 185

Acc: A size adjustable gobo-holder

PGB R 185

Acc: B size adjustable gobo-holder

PO/2 SP25

Yoke: Pole Operated for Pan-Tilt

PO/3 SP25

Yoke: Pole Operated for Pan-Tilt-Focus

TC S25

Acc: Colour frame