



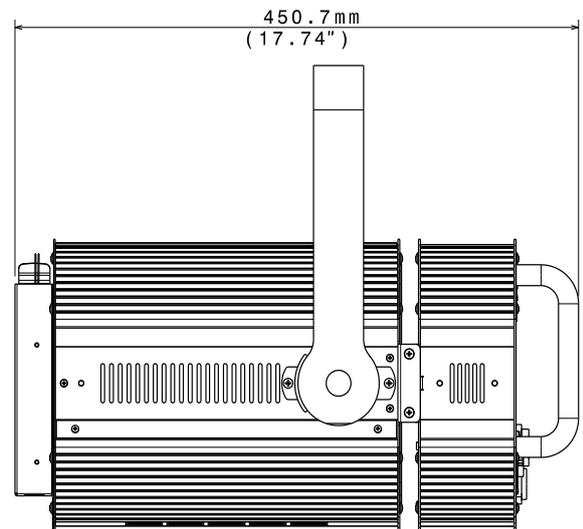

SCENA LED 200 FC

THE THEATRE LED PROJECTOR WITH COLOR MIXING AND LINEAR ZOOM

SCENA LED 200 FC is a high power LED projector in a very compact and lightweight size. The unit is equipped with a **high efficiency 200 W RGBW LED source**, coupled with a **14° - 60° linear zoom**. This layout makes the unit particularly suitable for theatres, TV studios, exhibitions, events and any application requiring an **endless palette of colors** and a **DMX / RDM remote management of zoom, dimming and shutter functions**.

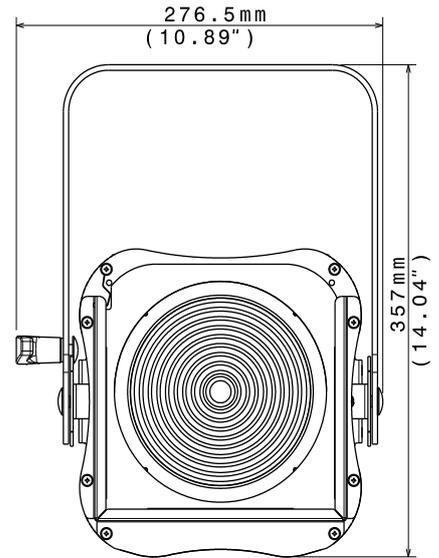

LED	FC Full Color	built-in PSU	IP20	RDM/DMX	-10° +40°
-----	---------------	--------------	------	---------	-----------



03.TS054.46.F

OUTPUT

- Single high-power Full Color (RGBW) LED
- LED lifespan: 50,000 hours (70% lumen output)

OPTICAL GROUP

- Ø 150 mm Fresnel lens
- 14°- 60° linear zoom

COLOR GENERATION

- 28 Gel Filters Macros
- Wide palette of pure uniform whites with variable linear color temperature (2700K - 8000K)

CONTROL

- DMX 512 / RDM or Manual control
- 10 DMX channels (default)
- 4-digit 7-segment LED display + 4 soft keys
- Internal operating system updatable via DTS dongle firmware uploader

POWER SUPPLY

- Full-range 100-240Vac 50-60 Hz
- Power consumption: 200 W max
- Power Factor: PF >0.94

CONNECTIONS

- Power supply: PowerCON TRUE1 In/Out panel connectors
- DMX: XLR 5-pole In/Out panel connectors

INTERNAL SAFETY DEVICES

Overvoltage and overtemperature circuits protection

OPERATING TEMPERATURE

-10° / 40°C

PHYSICAL

- IP20
- Weight: 8.4 Kg (18.5 lbs)
- Finishing: Black

SHIPPING

- Packaging: Carton box
- Box size (LxHxD): 575 x 280 x 345 mm (22.6" x 11" x 13.6")
- Weight: 9.8 Kg (21.6 lbs)

ACCESSORIES INCLUDED

- 1 x PowerCON TRUE1 female cable connector (code 0520P066)
- 1 x XLR 5 pins female cable connector (code 0508B147)
- 1 x XLR 5 pins male cable connector (code 0508B148)
- 1 x Filterframe Black finishing - already installed on the projector (code 02M093278.46)

ACCESSORIES ON REQUEST

- Barndoor Black finishing (code 03.TBD04)
- "C" Clamp G60 - max. Load 50 Kg (code 0521A004)
- Safety cable - 0.3x60 cm - max. capacity load 60 Kg (code 0521A010)
- DTS dongle firmware uploader (code 03.LA.206)

PHOTOMETRIC DATA

	mt 2 ft 6.56	mt 4 ft 13.12	mt 6 ft 19.68	mt 8 ft 26.25	mt 10 ft 32.81
BEAM ANGLE 14° @ 50%					
lux center (lx)	15744	3936	1749	984	630
foot candles (fc)	1463	366	163	91	59
diameter (cm)	49	98	147	196	246
diameter (ft)	1.61	3.22	4.83	6.45	8.06
BEAM ANGLE 60° @ 10%					
lux center (lx)	4081	1020	453	255	163
foot candles (fc)	379	95	42	24	15
diameter (cm)	231	462	693	924	1155
diameter (ft)	7.58	15.15	22.73	30.31	37.88