




MINI BRICK FC

Official Photometric Chart

ULTRA-NARROW lenses

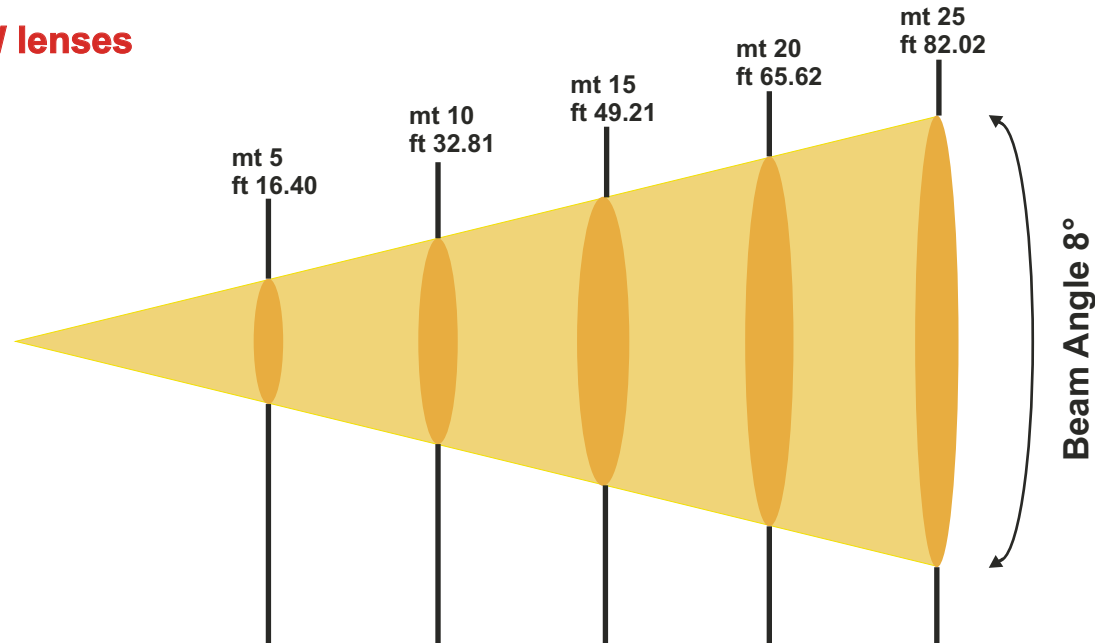


RED	Lux center [lx]	2384	596	265	149	95
	Foot candles [fc]	222	55	25	14	9
GREEN	Lux center [lx]	4310	1078	479	269	172
	Foot candles [fc]	401	100	45	25	16
BLUE	Lux center [lx]	315	79	35	20	13
	Foot candles [fc]	29	7	3	2	1
WHITE	Lux center [lx]	5282	1321	587	330	211
	Foot candles [fc]	491	123	55	31	20
FULL RGBW	Lux center [lx]	6767	1692	752	423	271
	Foot candles [fc]	629	157	70	39	25
BEAM ANGLE	Diameter [cm]	70	140	210	280	350
	Diameter [ft]	2.29	4.59	6.88	9.18	11.47



MINI BRICK FC

Official Photometric Chart

**ULTRA-NARROW lenses
with 20° holographic filter**

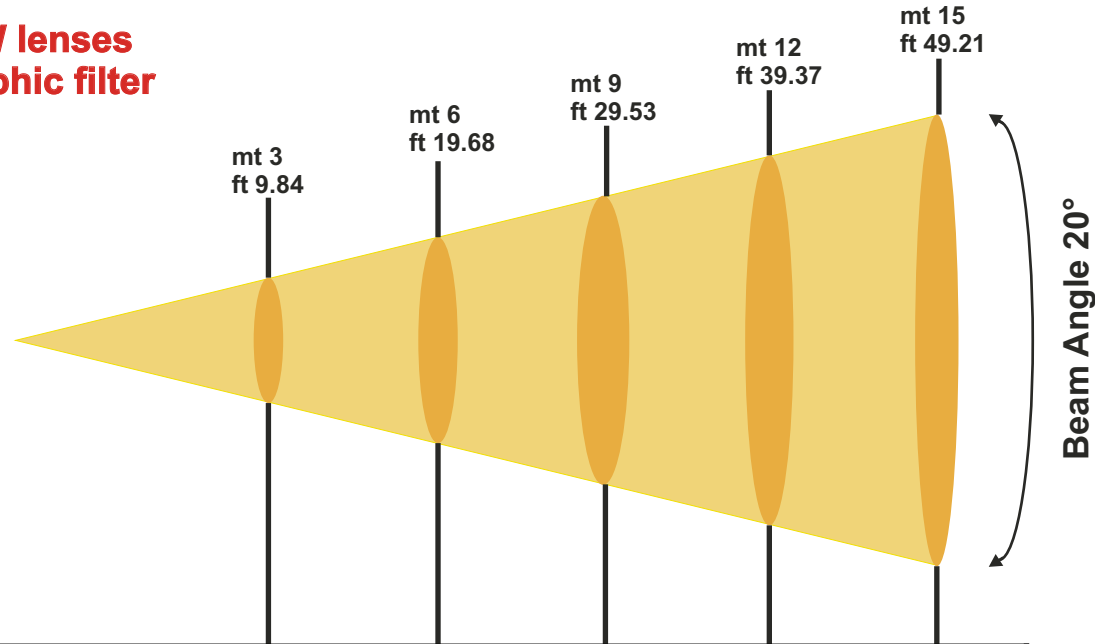


RED	Lux center [lx]	812	203	90	51	32
	Foot candles [fc]	75	19	8	5	3
GREEN	Lux center [lx]	1605	401	178	100	64
	Foot candles [fc]	149	37	17	9	6
BLUE	Lux center [lx]	130	33	14	8	5
	Foot candles [fc]	12	3	2	2	1
WHITE	Lux center [lx]	1918	480	213	120	77
	Foot candles [fc]	178	45	20	11	7
FULL RGBW	Lux center [lx]	3038	760	338	190	122
	Foot candles [fc]	282	71	31	18	11
BEAM ANGLE	Diameter [cm]	106	212	317	423	529
	Diameter [ft]	3.47	6.94	10.41	13.88	17.35



MINI BRICK FC

Official Photometric Chart

**ULTRA-NARROW lenses
with 40° holographic filter**

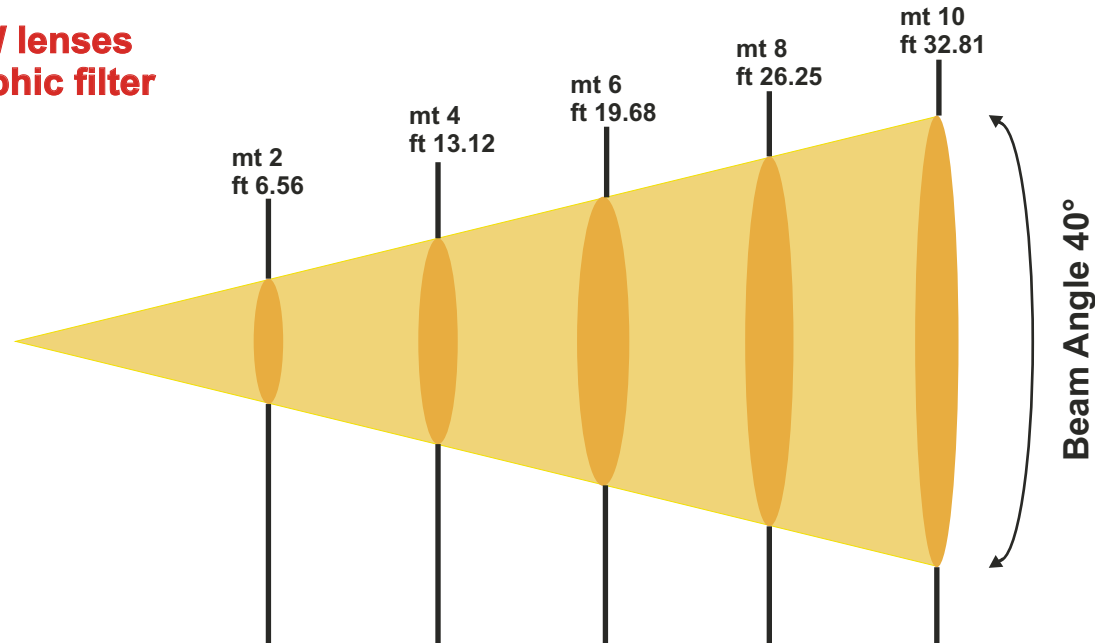


RED	Lux center [lx]	612	153	68	38	24
	Foot candles [fc]	57	14	6	4	2
GREEN	Lux center [lx]	1250	313	139	78	50
	Foot candles [fc]	116	29	13	7	5
BLUE	Lux center [lx]	97	24	11	6	4
	Foot candles [fc]	9	2	2	2	1
WHITE	Lux center [lx]	1487	372	165	93	59
	Foot candles [fc]	138	35	15	9	6
FULL RGBW	Lux center [lx]	2240	560	249	140	90
	Foot candles [fc]	208	52	23	13	8
BEAM ANGLE	Diameter [cm]	146	291	437	582	728
	Diameter [ft]	4.78	9.55	14.33	19.11	23.88



MINI BRICK FC

Official Photometric Chart

**ULTRA-NARROW lenses
with 60°x10° holographic filter**

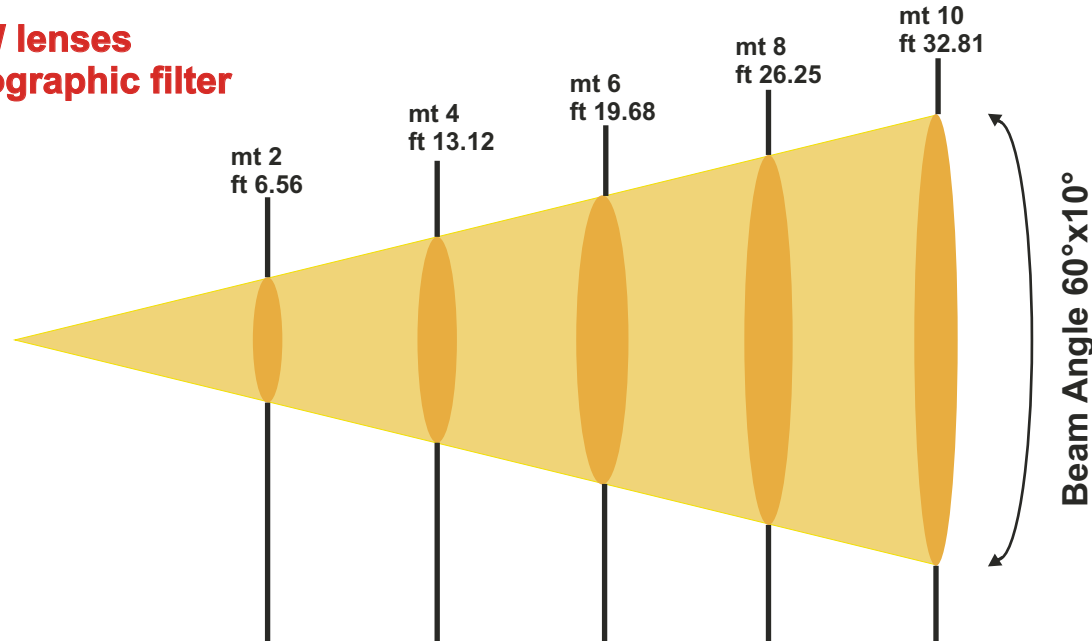

RED	Lux center [lx]	1247	312	139	78	50	
	Foot candles [fc]	116	29	13	7	5	
GREEN	Lux center [lx]	2387	597	265	149	95	
	Foot candles [fc]	222	55	25	14	9	
BLUE	Lux center [lx]	197	49	22	12	8	
	Foot candles [fc]	18	5	2	2	2	
WHITE	Lux center [lx]	3030	758	337	189	121	
	Foot candles [fc]	282	70	31	18	11	
FULL RGBW	Lux center [lx]	4527	1132	503	283	181	
	Foot candles [fc]	421	105	47	26	17	
X-axis	Diameter [cm]	231	462	693	924	1155	Beam Angle 60°
	Diameter [ft]	7.58	15.15	22.73	30.31	37.88	
Y-axis	Diameter [cm]	35	70	105	140	175	Beam Angle 10°
	Diameter [ft]	1.15	2.30	3.44	4.59	5.74	