

VICE 1 DOWNLIGHT



Le informazioni contenute in questo documento sono state attentamente redatte e controllate. Tuttavia non è assunta alcuna responsabilità per eventuali inesattezze. Tutti i diritti sono riservati e questo documento non può essere copiato, fotocopiato, riprodotto per intero o in parte senza previo consenso scritto della D.T.S .

D.T.S si riserva il diritto di apportare senza preavviso cambiamenti e modifiche estetiche , funzionali o di design a ciascun proprio prodotto. D.T.S non assume alcuna responsabilità sull'uso o sull'applicazione dei prodotti o dei circuiti descritti.

The information contained in this publication has been carefully prepared and checked. However, no responsibility will be taken for any errors. All rights are reserved and this document cannot be copied, photocopied or reproduced, in part or completely, without prior written consent from D.T.S. D.T.S. reserves the right to make any aesthetic, functional or design modifications to any of its products without prior notice. D.T.S. assumes no responsibility for the use or application of the products or circuits described herein.

Les informations contenues dans le présent manuel ont été rédigées et contrôlées avec le plus grand soin. Nous déclinons toutefois toute responsabilité en cas d'éventuelles inexactitudes. Tous droits réservés. Ce document ne peut être copié, photocopié ou reproduit, dans sa totalité ou partiellement, sans le consentement préalable de D.T.S.

D.T.S. se réserve le droit d'apporter toutes modifications et améliorations esthétiques, fonctionnelles ou de design, sans préavis, à chacun de ses produits. D.T.S. décline toute responsabilité sur l'utilisation ou sur l'application des produits ou des circuits décrits.

Las informaciones contenidas en este documento han sido cuidadosamente redactadas y controladas. Con todo, no se asume ninguna responsabilidad por eventuales inexactitudes. Todos los derechos han sido reservados y este documento no puede ser copiado, fotocopiado o reproducido, total o parcialmente, sin previa autorización escrita de D.T.S.

D.T.S. se reserva el derecho a aportar sin previo aviso cambios y modificaciones de carácter estético, funcional o de diseño a cada producto suyo. D.T.S. no se asume responsabilidad de ningún tipo sobre la utilización o sobre la aplicación de los productos o de los circuitos descritos.

VICE 1 DOWNLIGHT

DTS Product codes:

03.LVS004E03FC25

VICE 1 DOWNLIGHT medium lens RAL 9010 finishing

03.LVS004E03FC40

VICE 1 DOWNLIGHT wide lens RAL 9010 finishing

LED technology

1 x FULL RGBW LED

Lumens: 420 @ 700 mA

LED average lifespan: 50.000 hours (70% lumen output)

Optical group

2 optics available: Medium flood; Wide flood


Control

DMX 512 / RDM / Art-Net (DRIVENET 416, 832 or 1664 PSU is required)

Protection

IP20

(IP65 unit front side)



Construction

VICE 1 DOWNLIGHT is made on aluminium

Power supply

DRIVENET 416 or 832 PSU (full-range 100-240Vac 50-60Hz)

DRIVENET 1664 PSU (range 180-240Vac 50-60Hz)

Power consumption

10W Max

Connections

8 poles cable (1 m length)


Operating ambient temperature

-10° / 40°

Weight

0,23 Kg

DIMENSIONS

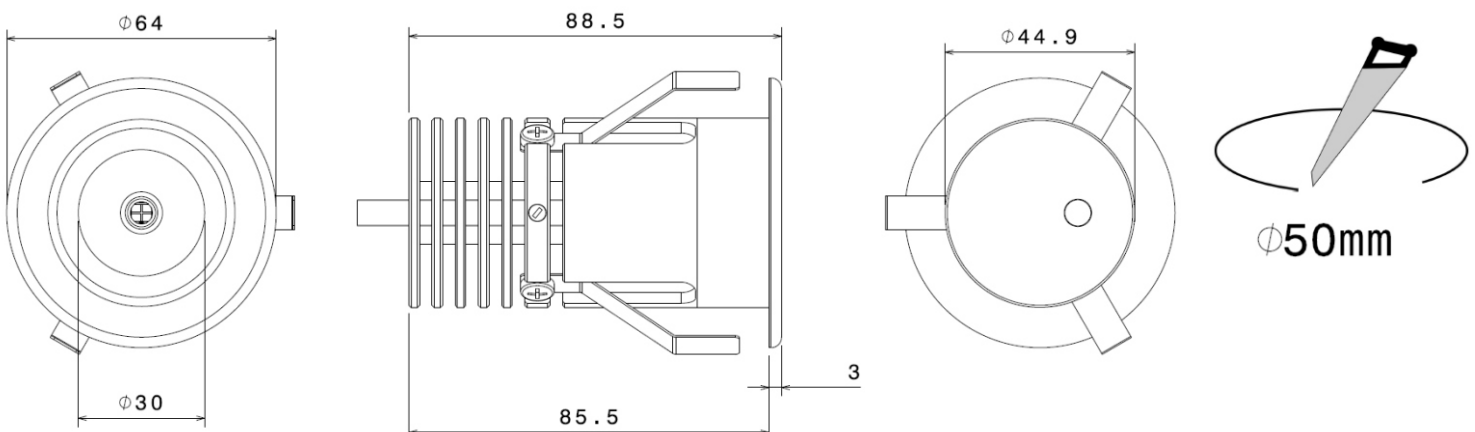

ACCESSORIES

- DRIVENET416 PSU (Code 03.LA.196)
- DRIVENET832 PSU (Code 03.LA.177)
- DRIVENET1664 PSU (Code 03.LA.198)
- T-BOX IP20 3 OUTS Screw terminals (Code 03.LA.131)

IMPORTANT SAFETY INFORMATION

Fire prevention:

It is permissible to place the unit on normally flammable surfaces.

Suitable for mounting on normally flammable materials surfaces greater than 200°C with some combustion time lag.

Safety:

The external surface of the unit may exceed 50°C, never handle the unit until at least 5 minutes have elapsed since the unit was turned off.

Never install the unit in an enclosed area lacking sufficient air flow.

The ambient temperature should not exceed 40°C and should not be lower than -10°C.


CONNECTIONS

VICE 1 DOWNLIGHT is provided with a 8 poles cable (1 m length).

CONNECTION		
PIN OUT	LED	WIRES COLOURS
PIN 1	RED +	WHITE
PIN 2	RED -	BROWN
PIN 3	GREEN +	GREEN
PIN 4	GREEN -	YELLOW
PIN 5	BLUE +	GREY
PIN 6	BLUE -	PINK
PIN 7	WHITE +	RED
PIN 8	WHITE -	BLUE

LEDs OUTPUT



1	2	3	4	5	6	7	8
R+	R-	G+	G-	B+	B-	W+	W-

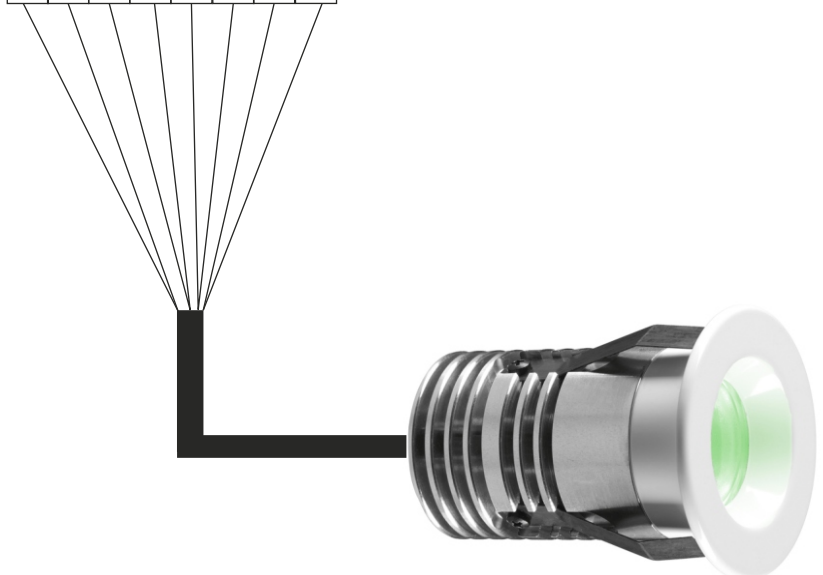


The maximum distance between DRIVENET PSU and the unit should not exceed 100 meters.

WIRING DIAGRAMS

DRIVENET 832 PSU (Code 03.LA.177)

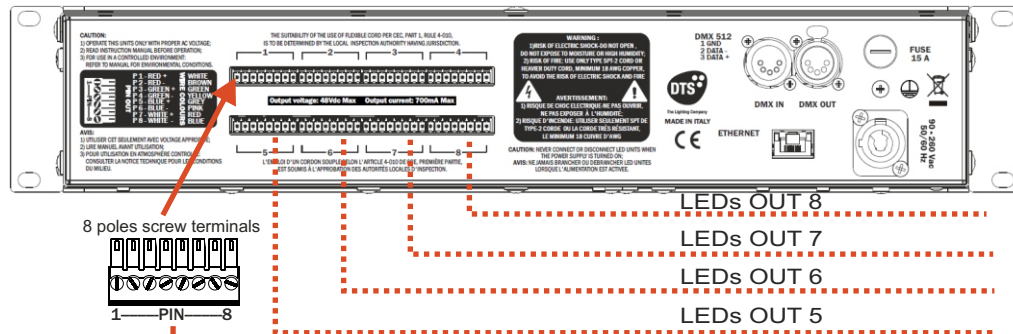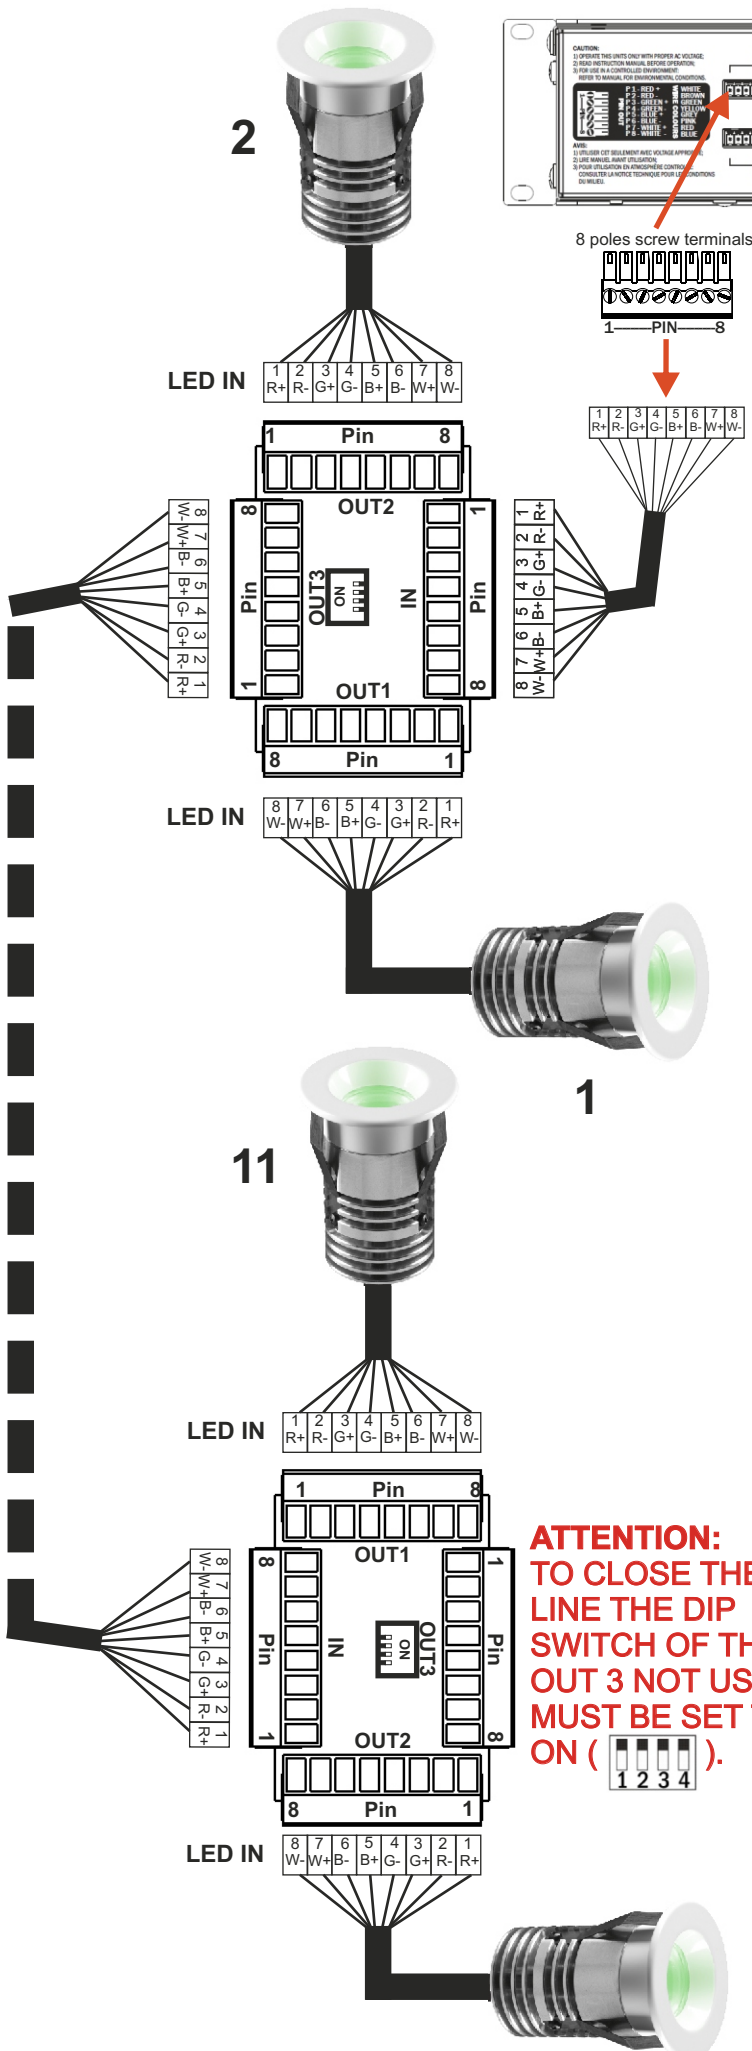

CONNECTION		
PIN OUT	LED	WIRES COLOURS
PIN 1	RED +	WHITE
PIN 2	RED -	BROWN
PIN 3	GREEN +	GREEN
PIN 4	GREEN -	YELLOW
PIN 5	BLUE +	GREY
PIN 6	BLUE -	PINK
PIN 7	WHITE +	RED
PIN 8	WHITE -	BLUE

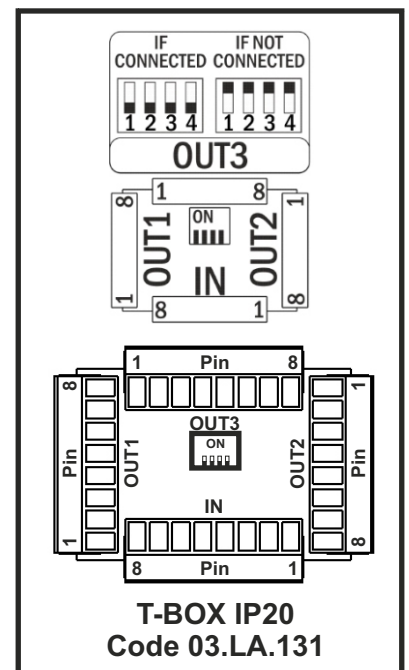

ATTENTION:
TO CLOSE THE
LINE THE DIP
SWITCH OF THE
OUT 3 NOT USED
MUST BE SET TO
ON ().

The maximum number of VICE connectable to each output of DRIVENET 832 PSU is 12 pcs.

Never plug the cable coming from the PSU into OUT 1, OUT 2 or OUT 3 of the T-BOX because a wrong connection can seriously damage the unit or the PSU.

Never plug in a new VICE 1 DOWNLIGHT when the PSU is turned on.

The maximum distance between DRIVENET PSU and the unit should not exceed 100 meters.

NOTES

NOTES

PROUDLY
MADE IN ITALY



DTS products are designed
and manufactured at the
DTS plants in Italy



ISO 9001:2008

DTS quality system is certified
to the ISO 9001:2008 standard

