




AkkuLED Tough 9

led22675

DMX-Channels

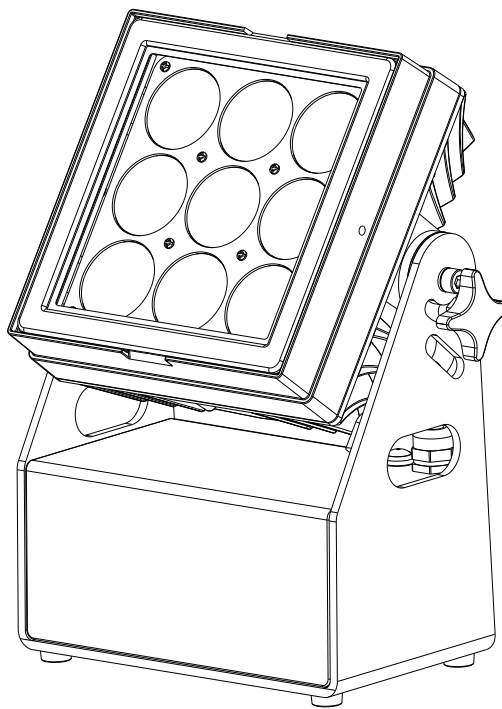

DMX-Modi: 4

Channels: 7 / 7 / 11 / 15

DMX-Chart V201711-001

Änderungen sind ohne Ankündigung möglich.
Changes are possible without prior notice.

SSP

CHANNEL	VALUE	FUNCTION
1	0 ⇔ 255	MASTER DIMMER
2	0 ⇔ 255	RED
3	0 ⇔ 255	GREEN
4	0 ⇔ 255	BLUE
5	0 ⇔ 255	LIME
6		STROBE
	0 ⇔ 9	NO FUNCTION
	10 ⇔ 99	STROBE FROM (SLOW TO FAST , 0-25Hz)
	100 ⇔ 109	NO FUNCTION
	110 ⇔ 179	LIGHTNING STROBE
	180 ⇔ 189	NO FUNCTION
	190 ⇔ 255	RANDOM STROBE
7		DIMMER SPEED
	0 ⇔ 9	NO FUNCTION
	10 ⇔ 29	OFF
	30 ⇔ 69	DIM1
	70 ⇔ 129	DIM2
	130 ⇔ 189	DIM3
	190 ⇔ 255	DIM4

HSIC

CHANNEL	VALUE	FUNCTION
1	0 ⇔ 255	INTENSIYT
2	0 ⇔ 255	HUE
3	0 ⇔ 255	HUE FINE
4	0 ⇔ 255	SATURATION
5		CCT
	0 ⇔ 10	NO FUNCTION
	11 ⇔ 50	2700K
	51 ⇔ 90	3200K
	91 ⇔ 130	4200K
	131 ⇔ 170	5600K
	171 ⇔ 210	6500K
	211 ⇔ 255	8000K
6		STROBE
	0 ⇔ 9	NO FUNCTION
	10 ⇔ 99	STROBE FROM (SLOW TO FAST , 0-25Hz)
	100 ⇔ 109	NO FUNCTION
	110 ⇔ 179	LIGHTNING STROBE
	180 ⇔ 189	NO FUNCTION
	190 ⇔ 255	RANDOM STROBE
7		DIMMER SPEED
	0 ⇔ 9	NO FUNCTION
	10 ⇔ 29	OFF
	30 ⇔ 69	DIM1
	70 ⇔ 129	DIM2
	130 ⇔ 189	DIM3
	190 ⇔ 255	DIM4

TOUR

CHANNEL	VALUE	EFFECT
1	0 ⇔ 255	MASTER DIMMER
2	0 ⇔ 255	RED
3	0 ⇔ 255	GREEN
4	0 ⇔ 255	BLUE
5	0 ⇔ 255	LIME
6		MARCOS
	0 ⇔ 9	NO FUNCTION
	10 ⇔ 29	RED 100% / GREEN UP / BLUE 0%
	30 ⇔ 49	RED DOWN / GREEN 100% / BLUE 0%
	50 ⇔ 69	RED 0% / GREEN 100% / BLUE UP
	70 ⇔ 89	RED 0% / GREEN DOWN / BLUE 100%
	90 ⇔ 109	RED UP / GREEN 0% / BLUE 100%
	110 ⇔ 129	RED 100% / GREEN 0% / BLUE DOWN
	130 ⇔ 149	RED 100% / GREEN UP / BLUE UP
	150 ⇔ 169	RED DOWN / GREEN DOWN / BLUE 100%
	170 ⇔ 189	ALL LED AT FULL OUTPUT
	190 ⇔ 199	2700K
	200 ⇔ 209	3200K
	210 ⇔ 219	4200K
	220 ⇔ 229	5600K
	230 ⇔ 239	6500K
	240 ⇔ 255	8000K
7		STROBE
	0 ⇔ 9	NO FUNCTION
	10 ⇔ 99	STROBE FROM (SLOD TO FAST , 0-25Hz)
	100 ⇔ 109	NO FUNCTION
	110 ⇔ 179	LIGHTNING STROBE
	180 ⇔ 189	NO FUNCTION
	190 ⇔ 255	RANDOM STROBE
8		PIXEL EFFECT
	0 ⇔ 9	NO FUNCTION
	10 ⇔ 24	STATIC 1
	25 ⇔ 39	STATIC 2
	40 ⇔ 54	STATIC 3
	55 ⇔ 69	STATIC ALL
	70 ⇔ 84	AUTO 1-2-3
	85 ⇔ 99	AUTO 1-3-2
	100 ⇔ 114	AUTO 2-1-3
	115 ⇔ 129	AUTO 2-3-1
	130 ⇔ 144	2700k as the running color 1→2→3, The background color can be related to the color for #1.#2.#3.#4.#5.#6.#7.#10.#11 LEDs.
	145 ⇔ 159	2700k as the running color 1→3→2, The background color can be related to the color for #1.#2.#3.#4.#5.#6.#7.#10.#11 LEDs.

CHANNEL	VALUE	EFFECT
8	160 ↔ 174	2700k as the running color 2→1→3, The background color can be related to the color for #1.#2.#3.#4.#5.#6.#7.#10.#11 LEDS.
	175 ↔ 189	2700k as the running color 2→3→1, The background color can be related to the color for #1.#2.#3.#4.#5.#6.#7.#10.#11 LEDS.
	190 ↔ 204	8000k as the running color 1→2→3, The background color can be related to the color for #1.#2.#3.#4.#5.#6.#7.#10.#11 LEDS.
	205 ↔ 219	8000k as the running color 1→3→2, The background color can be related to the color for #1.#2.#3.#4.#5.#6.#7.#10.#11 LEDS.
	220 ↔ 234	8000k as the running color 2→1→3, The background color can be related to the color for #1.#2.#3.#4.#5.#6.#7.#10.#11 LEDS.
	235 ↔ 255	8000k as the running color 2→3→1, The background color can be related to the color for #1.#2.#3.#4.#5.#6.#7.#10.#11 LEDS.
9		AUTO
	0 ↔ 40	NO FUNCTION
	41 ↔ 50	ATUO1
	51 ↔ 60	ATUO2
	61 ↔ 70	ATUO3
	71 ↔ 80	ATUO4
	81 ↔ 90	ATUO5
	91 ↔ 100	ATUO6
	101 ↔ 110	ATUO7
	111 ↔ 120	ATUO8
	121 ↔ 130	ATUO9
	131 ↔ 140	ATUO10
	141 ↔ 150	PROGRAM1
	151 ↔ 160	PROGRAM2
	161 ↔ 170	PROGRAM3
	171 ↔ 180	PROGRAM4
	181 ↔ 190	PROGRAM5
	191 ↔ 200	PROGRAM6
	201 ↔ 210	PROGRAM7
	211 ↔ 220	PROGRAM8
	221 ↔ 230	PROGRAM9
	231 ↔ 255	PROGRAM10
10	0 ↔ 255	AUTO SPEED ADJUSTMENT
11		DIMMER SPEED
	0 ↔ 9	NO FUNCTION
	10 ↔ 29	OFF
	30 ↔ 69	DIM1
	70 ↔ 129	DIM2
	130 ↔ 189	DIM3
	190 ↔ 255	DIM4

PIXEL

CHANNEL	VALUE	EFFECT
1	0 ⇔ 255	DIMMER
2		STROBE
	0 ⇔ 9	NO FUNCTION
	10 ⇔ 99	STROBE FROM (SLOD TO FAST , 0-25Hz)
	100 ⇔ 109	NO FUNCTION
	110 ⇔ 179	LIGHTNING STROBE
	180 ⇔ 189	NO FUNCTION
	190 ⇔ 255	RANDOM STROBE
3	0 ⇔ 255	RED1
4	0 ⇔ 255	GREEN1
5	0 ⇔ 255	BLUE1
6	0 ⇔ 255	LIME1
7	0 ⇔ 255	RED2
8	0 ⇔ 255	GREEN2
9	0 ⇔ 255	BLUE2
10	0 ⇔ 255	LIME2
11	0 ⇔ 255	RED3
12	0 ⇔ 255	GREEN3
13	0 ⇔ 255	BLUE3
14	0 ⇔ 255	LIME3
15		DIMMER SPEED
	0 ⇔ 9	NO FUNCTION
	10 ⇔ 29	OFF
	30 ⇔ 69	DIM1
	70 ⇔ 129	DIM2
	130 ⇔ 189	DIM3
	190 ⇔ 255	DIM4

